

SHARP PACKAGING CONVEYOR

Key Features

- Structure is made of S.S. 304, 30mm sq. pipe, 16 SWG with matt finish. A/c frequency variable drive.
- Belt alignment system for long life and straight running of belt.
- Direct gear drive.
- Length can be made as per customer requirement.
- S.S. elegantly matt finishing.
- Adjustable height of conveyor belt, to align with other machine of the line.
- Self-alignment bearing for easy maintenance.
- Rigid vibration free construction for trouble free performance.

nce.

Optional Features


- Castor wheel with lock.
- Extra and table at end of conveyor.
- Special type adjustable angle at initial of conveyor for strip or blister packing
- S.S. chain instead of PVC belt.





DEMONSTRATION AVAILABLE



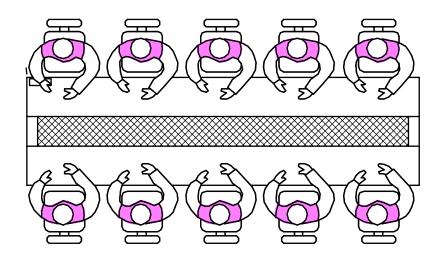

Regd. Office: Plot No. 76, G.I.D.C., kalol (N.G.)-382721 Ph: (02764) 220525 Fax: (02764) 223086

E-mail: info@spmpl.com www.spmpl.com